

Zenith Evacuated Tube


Solar thermal collectors

14 INDIVIDUAL TUBES

HIGHLY SELECTIVE FINISH

IDEAL FOR RETRO AND
NEW BUILD APPLICATIONS

SOLAR KEYMARK SEAL OF
APPROVAL

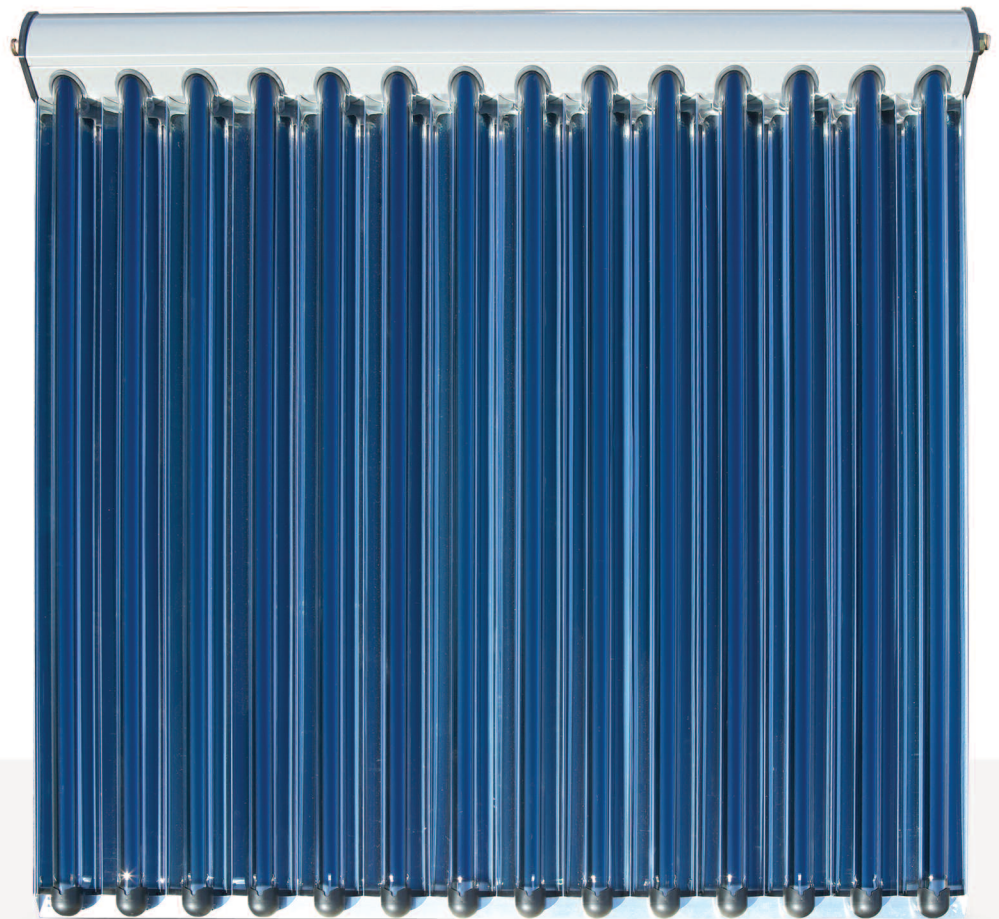

Zenith Evacuated Tube Solar thermal collectors

SPECIFICATIONS	Zenith Inset Collector
Total area	2.52m ²
Exposed area	2.32m ²
Effective absorption area	2.28m ²
Empty weight	54 kg
Liquid content	1.70 L
Recommended flow rate per m ² of collector (per hr)	30 L
Glass type	Safety glass with anti-reflective surface
Glass thickness	4 mm
Absorption (α)	95%
Emissions (β)	5%
Maximum permitted pressure	10 bar
Maximum temperature	230°C
Dimensions	
Height (mm)	1647
Width (mm)	1560
Depth (mm)	107



Evacuated tube technology provides better efficiency in cooler parts of the UK due to their ability to absorb and retain Solar radiation, with the tubes working on the same principle as a vacuum flask.

High build quality designed to use both direct sunlight and daylight maximising energy performance even on cloudy days.

Ideal for retro fit and new build applications.

Evacuated tube collectors have greater application flexibility, this is due to the wider range of angles the collector can be positioned in, while maintaining effective absorption.

As a guide 1m² of Solar collector is required per person and up to 6 collectors can be connected in a series.

Zenith Solar thermal collector systems are pressurised which provides greater flexibility for siting of the collector and a faster reaction time to daylight and sunlight, maximising the sun's energy.

Integrated CPC mirrors maximise absorption even in oblique light.

A highly selective finish on the copper absorber plate within each tube guarantees exceptional absorption performance.

14 individual tubes in each collector.

Long working life, with no metal parts passing through the glass tubes to cause loss of vacuum.

Zenith Solar thermal packages include an intelligent controller for increased functionality and flexibility.

Solar Keymark seal of approval.

Zenith Solar thermal packages are available; that include collector(s), premium control and all fittings and connections, helping to ensure your installer has everything they require for a hassle free installation.

BOILER COMPATIBILITY

Mynute 12HE	Mynute 25HE	Mynute 12VHE
Mynute 30HE	Mynute 15HE	Mynute 15VHE
Mynute 35HE	Mynute 20HE	Mynute 20VHE

OPTIONS

Description	Code
Aquaflow Twin Coil Cylinder 250	924
Aquaflow Twin Coil Cylinder 300	925



Registered Address: Vokèra Ltd Borderlake House, Unit 7 Riverside Industrial Estate, London Colney, AL2 1HG

Email: enquiries@vokera.co.uk Web: www.vokera.co.uk

Vokèra Ireland West Court, Callan, Co Kilkenny

Tel: 0844 391 0999

Tel: 056 7755057

Fax: 0844 391 0998

Fax: 056 7755060

Vokèra is a licensed member of the Benchmark scheme which aims to improve the standards of installation and commissioning of domestic hot water systems in the UK.