

# Zenith On Tile


## Solar thermal collectors

TEMPERED GLASS

HIGHLY SELECTIVE FINISH

IDEAL FOR RETRO BUILD  
APPLICATIONS

SOLAR KEYMARK SEAL OF  
APPROVAL

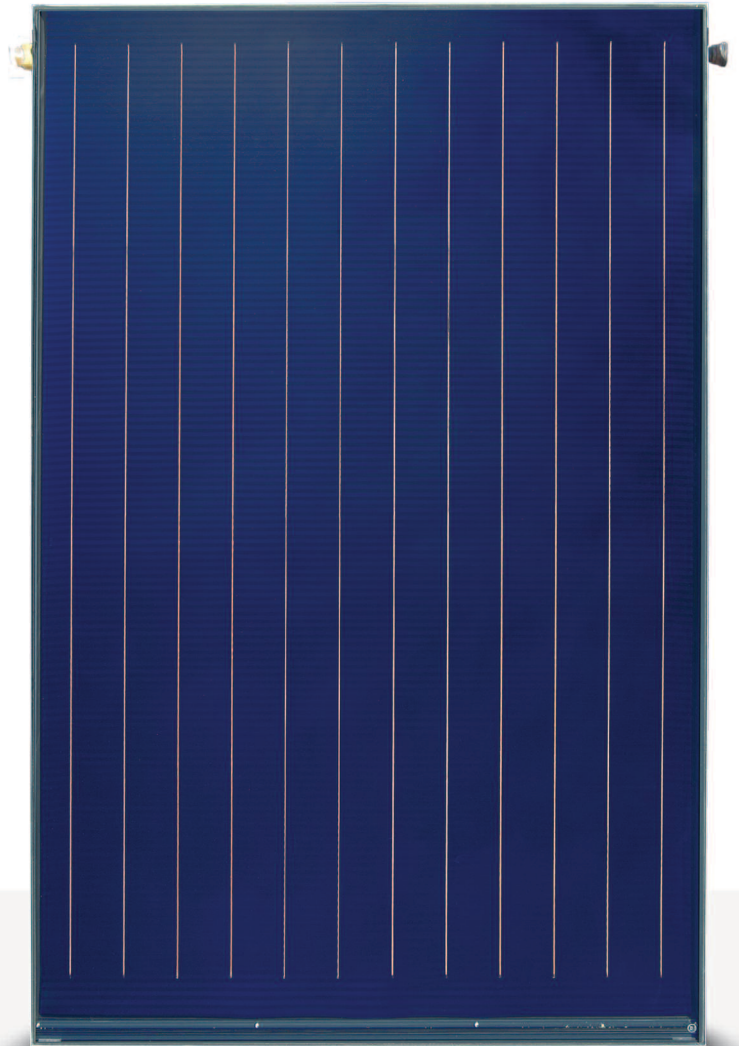

# Zenith On Tile

## Solar thermal collectors

SPECIFICATIONS	Zenith On Tile Collector
Total area	2.51m <sup>2</sup>
Exposed area	2.39m <sup>2</sup>
Effective absorption area	2.31m <sup>2</sup>
Connections (M - F)	1 inch
Empty weight	47 kg
Liquid content	1.65 L
Recommended flow rate per m <sup>2</sup> of collector (per hr)	30 L
Glass type	Safety glass with anti-reflective surface
Glass thickness	4 mm
Absorption ( $\alpha$ )	95%
Emissions ( $\beta$ )	5%
Maximum permitted pressure	10 bar
Maximum temperature	210°C
<b>Dimensions</b>	
Height (mm)	2150
Width (mm)	1170
Depth (mm)	83



OPTIONS	
Description	Code
Aquaflow Twin Coil Cylinder 250	924
Aquaflow Twin Coil Cylinder 300	925

High build quality designed to use both direct sunlight and daylight maximising energy performance even on cloudy days.

Ideal for retro fit applications with Solar collectors sitting on top of the roof tiles, therefore requiring minimal adaptation to the roof.

The collectors have an aluminium body, with a single - piece copper absorber plate to create a greater reflective surface, maximising energy performance.

Zenith Solar thermal packages include an intelligent controller for increased functionality and flexibility.

Flat plate collectors achieve optimum performance when positioned on a south facing roof at an angle of 35° and 45°. If this position is not possible a split system could be used whereby one collector would be placed on the east facing side of the roof and another on the west.

A highly selective finish on the copper absorber plate guarantees exceptional absorption performance.

The collectors are ultrasonically welded together to ensure high build quality and product longevity.

Heat transfer fluid flows through 12 individual copper pipes in the collector creating a larger surface area for the liquid, therefore increasing the level of absorption.

As a guide 1m<sup>2</sup> of Solar collector is required per person and up to 6 collectors can be connected in a series.

Zenith Solar thermal collector systems are pressurised which provides greater flexibility for siting of the collector and a faster reaction time to daylight and sunlight, maximising the sun's energy.

The bottom and walls of the tray are lined with 4cm of rock wool insulation to maximise heat retention and energy efficiency.

Low iron oxide content for high energy transmission and to minimise corrosion.

Each collector is protected with tempered glass to withstand extreme weather conditions, such as hail stones.

A well installed Zenith system will provide reliable, long lasting and extremely efficient service with a life expectancy of approximately 20+ years.

Solar Keymark seal of approval.

Zenith Solar thermal packages are available; that include collector(s), premium control and all fittings and connections, helping to ensure your installer has everything they require for a hassle free installation.

BOILER COMPATIBILITY		
Mynute 12HE	Mynute 25HE	Mynute 12VHE
Mynute 30HE	Mynute 15HE	Mynute 15VHE
Mynute 35HE	Mynute 20HE	Mynute 20VHE



Registered Address: Vokèra Ltd Borderlake House, Unit 7 Riverside Industrial Estate, London Colney, AL2 1HG

Email: [enquiries@vokera.co.uk](mailto:enquiries@vokera.co.uk) Web: [www.vokera.co.uk](http://www.vokera.co.uk)

Vokèra Ireland West Court, Callan, Co Kilkenny

Tel: 0844 391 0999

Tel: 056 7755057

Fax: 0844 391 0998

Fax: 056 7755060

Vokèra is a licensed member of the Benchmark scheme which aims to improve the standards of installation and commissioning of domestic hot water systems in the UK.